


IP 66 - class I - IK 08 - 100-277Vac ± 10% - 50/60Hz - Ta 45°C



Záruka: 5 let
 T lo svítidla: tlakoví litý hliník
 Difuzor: extra líré tvrzené sklo tl. 4mm
 Chladič: pasivní, žebrování na t le svítidla
 Životnost: > 100.000h L80B20 @ ta 25°C
 > 73.000h L90B10 @ ta 25°C
 Led: Osram - Ra > 70
 Rischio fotobiologico: classe RG 0
 Colore: nero RAL 9017
 Driver: programmabile (corrente, mezzanotte virtuale, CLO)
 protezione alle sovratensioni impulsive 10/6kV CM/DM
 dimmerazione su richiesta: 0-10V, DALI
 classe II : su richiesta

Warranty: 5 years
 Body: die cast aluminum
 Diffuser: extra clear temperate glass 4 mm
 Heat sink: die aluminum integrated in the body
 Life time: >100.000h L80B20 @ Ta 25°C
 > 73.000h L90B10 @ Ta 25°C

Led: Osram - Ra > 70
 Photo biological risk: class RG 0
 Color: black RAL 9017
 Driver: programmable (current, virtual midnight, CLO)
 surge protection level: 10/6kV CM/DM
 Dimming on request: 0-10V, DALI
 Class II: on demand

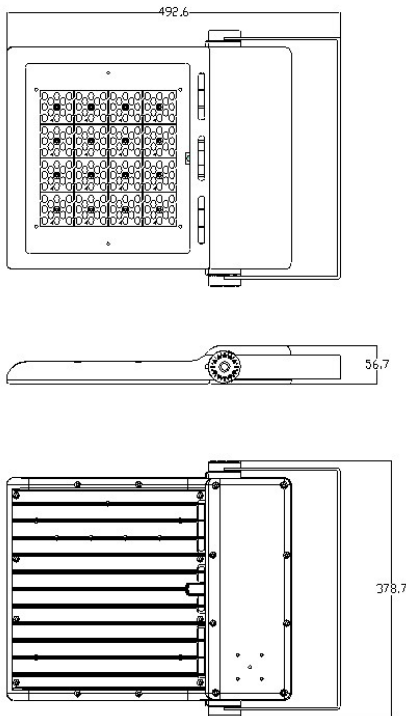


3000K CRI 70					
Description	W	Output Lumen	Lm/W	Weight (Kg)	Ta (°C)
SQUARE M 180-64-30-xx	180	22679	126	7,5	45
SQUARE M 200-64-30-xx	200	24910	125	7,5	45
SQUARE M 240-64-30-xx	240	28660	119	7,6	40


4000K CRI 70					
Description	W	Output lumen	Lm/W	Weight (Kg)	Ta (°C)
SQUARE M 180-64-40-xx	180	23795	132	7,5	45
SQUARE M 200-64-40-xx	200	26135	131	7,5	45
SQUARE M 240-64-40-xx	240	30080	125	7,6	40

5700K CRI 70					
Description	W	Output lumen	Lm/W	Weight (Kg)	Ta (°C)
SQUARE M 180-64-40-xx	180	23795	132	7,5	45
SQUARE M 200-64-57-xx	200	26135	131	7,5	45
SQUARE M 240-64-57-xx	240	30080	125	7,6	40


Tutti i dati sono riferiti a 25°C - tolleranza elettrica: ±5% - tolleranza flusso : ± 8%
 All data are referred to 25°C - electrical tolerance ±5% - flux tolerance : ± 8%




38




55



90



AS



ME

Altre fotometrie disponibili su richiesta
 Others photometries available on demand